


Your recycling needs. Our grinding solutions.

# **INJECTION MOULDING**

Granulator for IMM up to 200 m/Tons, in line runners up to 150°C, cold scraps

Grinding of all plastics, from TPU to PA6.6, filled with glass up to 25%

Optimal in-feed of the regrind material into dosing and feeding system

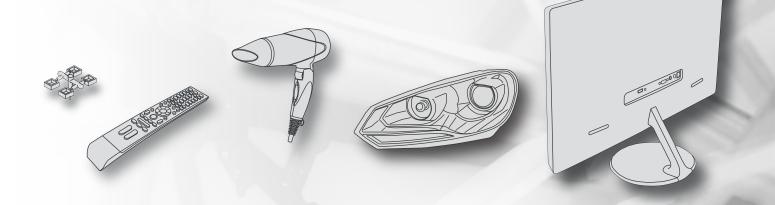

### **Regrind quality material**

Homogeneous and uniform regrind constantly produced. Mechanical and physical properties of plastics unchanged.



 Rotary discs integral with the rotor and containment rings avoid overheating and dust production

## **Efficient solutions**

Diverse production range of machines for recovery of scraps of varying size and weight maintenance reduced to the minimum.



- Shape, orientation and shutter of hoppers greatly reduce fly-back

#### **Energy** efficiency

Low running cost expressed in kWh/kg. Reaction power coso reduced to minimum thus having a direct impact on hourly energy cost.



Keys for the fixing of motor pulley and fly-wheelPulley and fly-wheel design gives higher inertia


#### Easy operation and maintenance

Reduced maintenance frequency and downtime by advance engineering design. Safety of operator during use and maintenance.



 Easy tool free access to screen, hopper, grinding chamber

## System

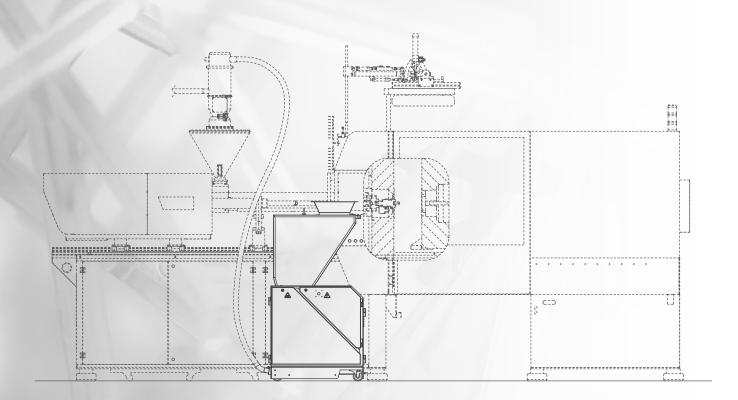

# Our granulators





TRIA Italy www.triaplastics.com TRIA America TRIA Brazil TRIA China TRIA Germany