



Your recycling needs. Our grinding solutions.


FILM

Inline recovery of edge trims CPP and LLDPE up to 1.000 m/min and 600 kg/h

High density of flake, up to 150 g/dm³, gives ease of feed back to the production machine

Complete system from edge trim intake to extruder throat or storage container

Inline recovery of edge trims BOPP PET PA up to 450 m/min, line break to 6.000 kg/h

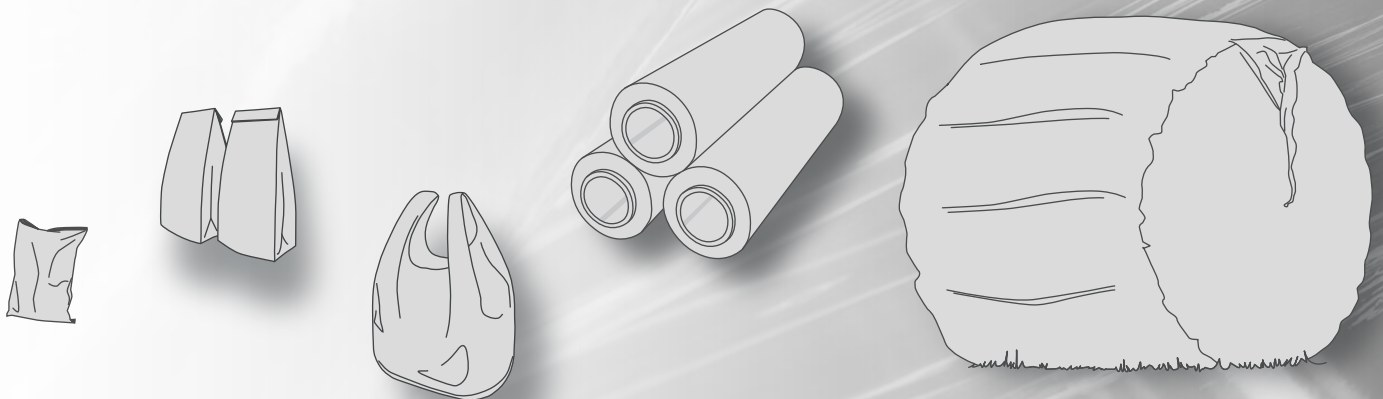

Regrind quality material

Homogeneous and uniform regrind constantly produced. Mechanical and physical properties of plastics unchanged.



- Efficient grinding with XT special cutting chamber
- High throughput screen, rotary discs integral with rotor and containment rings prevent overheating, the windings of the film and dust production

Energy efficiency

Low running cost expressed in kWh/kg.
Reaction power $\cos\phi$ reduced to minimum thus having a direct impact on hourly energy cost.



- Keys for the fixing of motor pulley and flywheel
- Pulley and flywheel design gives higher inertia

Efficient solutions

Know-how, design and production of complete plants, from transportation to storage, always at the vanguard with the continued relationship with the OEM.



- Loader of our own design and manufacture, compatible with all extruders
- Reliability and accuracy in the transport of trimmings and fluff thanks to the dedicated injector design


Easy operation and maintenance

Reduced maintenance frequency and downtime thanks to advance engineering design.
Safety of operator during use and maintenance.



- Easy tool free access to screen, hopper, grinding chamber

System

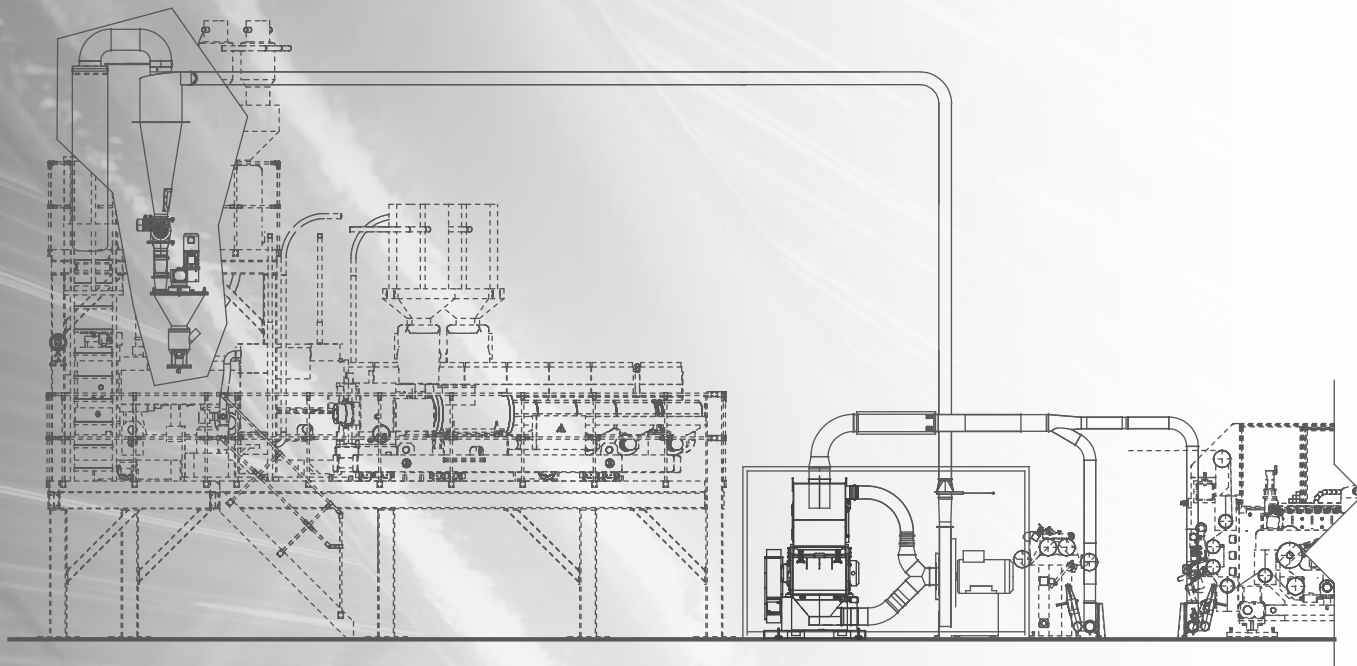

Our granulators



XT Series

XT 5030 XT 12042
XT 6042 XT 11060
XT 9042 XT 15080



GR Series
GR 20090



CR Series



Your recycling needs. Our grinding solutions.

TRIA Italy
www.trioplastics.com

TRIA America
TRIA Brazil

TRIA China
TRIA Germany